

Vented Hearth Heaters

 **WILLIAMS**



35,000 - 65,000 Btu/hr.

Enjoy instant warmth plus lower heating cost with a traditional enclosed or fireplace-look heater!



35,000 - 65,000 Btu/hr.

Our glass-front “fireplace-look” or enclosed vented hearth heaters provide comfort for hard-to-heat areas. Our vented hearth heaters are designed to give you maximum efficiency, low fuel consumption and quiet operation.



20,000 Btu/hr.

We have a compact enclosed model for smaller rooms that is both economical to purchase and operate.

Design Features

- ✓ No electricity required
- ✓ “Matchless” pilot igniter
- ✓ Burners engineered for quiet ignition and maximum heat efficiency
- ✓ Louvered-top design and front grille for improved heat circulation
- ✓ Factory-installed ceramic fiber logs (fireplace models)
- ✓ Natural and propane models (Conversion kit available)
- ✓ Automatic temperature and safety controls
- ✓ Resettable vent-limit switch
- ✓ Thermostat included, may be wall- or cabinet-mounted

Vented Hearth Heaters

Model Number		Btu/hr. Input	Btu/hr. Output	Efficiency Percentages		Dimensions			Vent Size	Center of Vent to Floor	Shipping Weight (lbs.)
Natural	Propane			Thermal	AFUE	Width	Depth	Height			
ENCLOSED FRONT MODELS											
2001622	2001621	20,000	15,500	80.0	73.0	23"	11"	21½"	3"	17"	45
3501522	3501521	35,000	26,250	75.0	68.0	25"	15⅝"	28⅞"	4"	21⅝"	74
* 3501922	* 3501921	35,000	26,250	75.0	68.0	25"	15⅝"	28⅞"	4"	21⅝"	83
5001522	5001521	50,000	34,500	69.0	64.0	30"	16"	32⅞"	4"	22¾"	103
* 5001922	* 5001921	50,000	34,500	69.0	64.0	30"	16"	32⅞"	4"	22¾"	112
6501522	6501521	65,000	50,400	78.0	71.0	34"	19⅝"	32⅞"	5"	24¾"	128
* 6501922	* 6501921	65,000	50,400	78.0	71.0	34"	19⅝"	32⅞"	5"	24¾"	137
GLASS FRONT "FIREPLACE-LOOK" MODELS											
3502522	3502521	35,000	26,250	75.0	68.0	25"	15⅝"	28⅞"	4"	21⅝"	81
* 3502922	* 3502921	35,000	26,250	75.0	68.0	25"	15⅝"	28⅞"	4"	21⅝"	90
5002522	5002521	50,000	34,500	69.0	64.0	30"	16"	32⅞"	4"	22¾"	108
* 5002922	* 5002921	50,000	34,500	69.0	64.0	30"	16"	32⅞"	4"	22¾"	117
6502522	6502521	65,000	50,400	78.0	71.0	34"	19⅝"	32⅞"	5"	24¾"	135
* 6502922	* 6502921	65,000	50,400	78.0	71.0	34"	19⅝"	32⅞"	5"	24¾"	144

* Equipped with Blower • All models have ½" gas connection

Features

"Matchless" Pilot Igniter

All models include a "matchless" pilot igniter. Assures convenient pilot lighting without matches.

Automatic Thermostat

No electricity required. All models are equipped with a self-generating millivolt thermostat that may be wall- or cabinet-mounted.


Contemporary Finish

Contemporary black, powder-coat, scratch-resistant finish to complement any décor.

Dimensions and Clearances

Model	A	B	C	D
200 Series	2"	36"	3"	24"
350, 500, & 650 Series	6"	57"	6"	24"

Important: Although the vent pipe is not shown, this product must be vented to the outside.

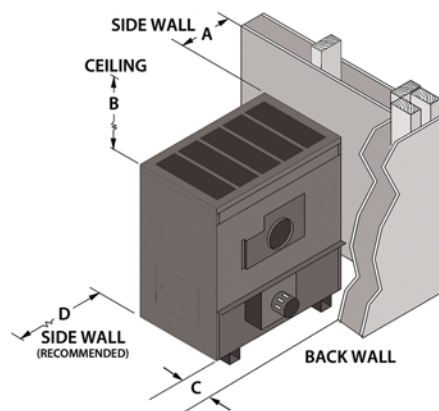

Great During
Power Outages!
No Electricity
Required

Accessories

Vent Collars

Contemporary black color to match the heater with a powder-coat, scratch-resistant finish.

Model 9102 for 3" vents. Shipping weight - 1lbs.

Model 9104 for 4" vents. Shipping weight - 1lbs.

Model 9106 for 5" vents. Shipping weight - 1lbs.




Floorboards

Contemporary black color to match the heater with a powder-coat, scratch-resistant finish.

Model 4163 for 50,000 and 65,000 Btu/hr. models. Oversized shipping weight - 16 lbs.


Model 4167 for 20,000 and 35,000 Btu/hr. models. Oversized shipping weight - 10 lbs.



Blower

Model 2102 A heavy-duty, quiet blower is available for larger rooms where faster heat circulation is desired. 150CFM, 120V. Shipping weight - 9 lbs.

Not for use on 20016 series.



Conversion Kits

Natural Gas to L.P. Gas or L.P. Gas to Natural Gas selections available.

High Altitude Models

Elevation	Natural Gas Model Numbers				L.P. Gas Model Numbers			
	20,000 Btu/hr.	35,000 Btu/hr.	50,000 Btu/hr.	65,000 Btu/hr.	20,000 Btu/hr.	35,000 Btu/hr.	50,000 Btu/hr.	65,000 Btu/hr.
2,001' to 4,000'	2011622	3511522	5011522	6511522	2011621	3511521	5011521	6511521
		3511922	5011922	6511922		3511921	5011921	6511921
		3512522	5012522	6512522		3512521	5012521	6512521
		3512922	5012922	6512922		3512921	5012921	6512921
4,001' to 6,000'	2031622	3531522	5031522	6531522	2031621	3531521	5031521	6531521
		3531922	5031922	6531922		3531921	5031921	6531921
		3532522	5032522	6532522		3532521	5032521	6532521
		3532922	5032922	6532922		3532921	5032921	6532921
6,001' to 8,000'	2051622	3551522	5051522	6551522	2051621	3551521	5051521	6551521
		3551922	5051922	6551922		3551921	5051921	6551921
		3552522	5052522	6552522		3552521	5052521	6552521
		3552922	5052922	6552922		3552921	5052921	6552921



Scan for more
information on
Williams' products



WILLIAMS

250 West Laurel Street • Colton, California 92324 USA
(909) 825-0993 • Fax: (909) 370-0581 or (909) 824-8009
Consumer Line: (888) 256-6465
Homeowner Assistance: (909) 426-0978
www.e-wfc.com

Important

- Read owner's manual before using/installing.
- Photographs are representative.
- Check local codes and ordinances for permitted uses.
- Consult installation manual for clearances prior to installation.
- We reserve the right to amend product specifications without notice.
- Installation and servicing recommended by a qualified service person.
- Venting must comply with the installation manual.
- Massachusetts approval G3-0711-701.
- Please read the warranty for any limitations for disclaimers.
- Combustion chamber carries a ten-year limited warranty. All other parts carry a one-year limited warranty.