

PBW110F,EXH.EXT.WALL FAN&FAN L

Item no. 412259

Document type: **Product card**

Document date: **2014-05-09**

Generated by: **Systemair Online Catalogue**

Description

- Exterior Wall Mount Bath Fan with one ceiling grill with a 14-watt instant-on fluorescent bulb.
- 120 CFM fan
- UL Listed for wet locations.

We have expanded our Premium Bath Fan selection to include a trio of models powered by exterior mounted wall fans. An excellent alternative when space is an issue or direct venting to the outside is required. Ideal for homes, condominiums and apartment complexes. Choose lit or unlit models.




Technical parameters

Voltage	115	V
Frequency	60	Hz
Phase	1	~
Power	17.7	W
Current	0.49	A
Max. airflow	136	cfm
Fan impeller speed	3084	r.p.m.
Max. temperature of transported air	140	°F
Weight	14	lbs.
Insulation class, motor	B	
Enclosure class, motor	44	IP
Certificate	HVV, cULus, cSAus Certified, UL listed for wet locations	

Performance


Diagrams

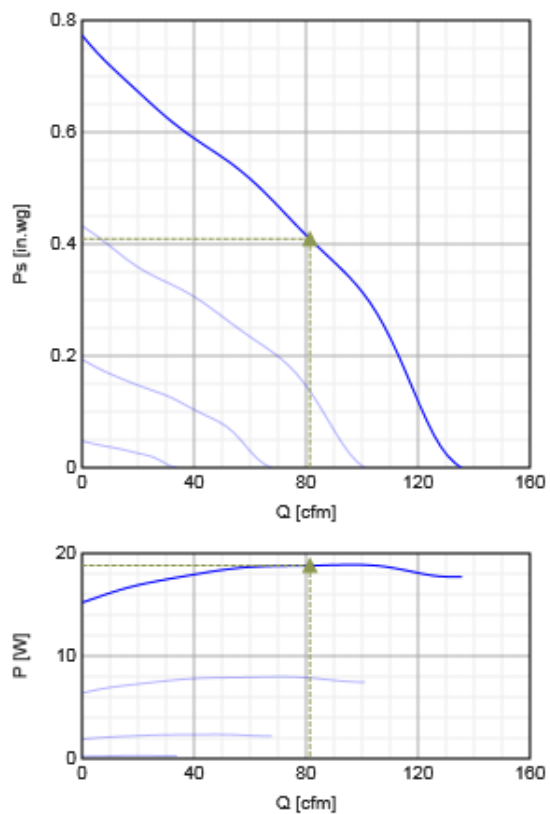

Hydraulic data

	Working point						
	Q [cfm]	Ps [in.wg]	P [W]	n [r.p.m.]	I [A]	SFP [W/l/s]	U [V]
Max efficiency	81.4	0.409	18.8	2995	-	0.49	115

Dimensions

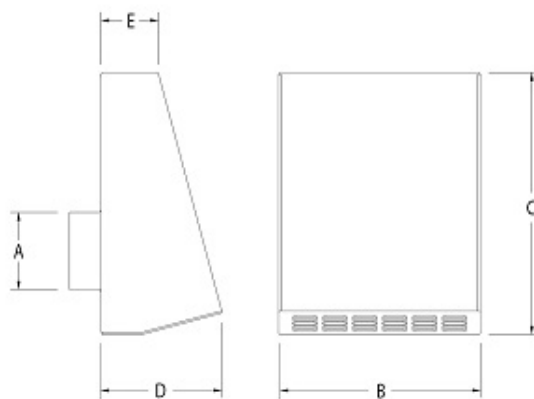

Model	A	B	C	D	E
PBW 110 / PBW 110H / PBW 110 F	4	10 1/4	13	6	2 3/4

Dimensions in inches

Accessories

Electric accessories

PBB14 (45155)
PBB50 (45156)
VT20A (45385)
VT20M (45386)

Accessories

FC 4, Clamp, 2Pcs Kit (411295)
FIDT4, Duct, Flex, Insul, 4, Alum (411061)

FY4,Y Adapter 4" (411249)
PBF4,7" Grill w/14W Fluor,4"dc (412263)
PBV4,7" Grill, 4" duct (412260)
RC4,Roof Cap 4" (411310)
RSK4,Damper (411112)

Documentation



[\(450065 PBW Series OIPM EN FR ES.pdf, 1MB\)](#)



[\(412220 Ventilation Solutions - Bathrooms EN.pdf, 7MB\)](#)