



Air Conditioning & Heating



1½ TO 5 TON

PRODUCT SPECIFICATIONS

CRT SERIES

13 SEER

ENERGY-EFFICIENT

SPLIT SYSTEM

AIR CONDITIONER

COOLING CAPACITY:
18,000 - 53,000 BTU/H



The CRT 13 SEER features an attractive louvered metal guard that protects the coil from damage and strengthens the unit. Designed for ground-level or rooftop mount, the raised base pan elevates the unit above the slab for excellent water drainage. The powder-paint finish provides premium durability and improved UV protection.

Standard Features

- Energy-efficient compressor
- Copper tube/aluminum fin coil
- Totally enclosed and permanently lubricated 8-pole, 840-RPM PSC condenser motor
- R-22 refrigerant-charged for 15' of refrigerant lines
- Factory-installed liquid line filter dryer
- Brass liquid and suction line service valves
- Contactor with lug connections
- Ground lug connection

Cabinet Features

- Heavy-gauge, galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Air Handler and Coil Compatibilities

- AEPF, ARUF and ADPF is a versatile upflow, horizontal or downflow air handler; these units may be located in closet, utility room, attic, or basement
- AWUF vertical wall-mounted electric heat air handler
- ACNF ceiling-mounted electric heat air handler
- MBR/MBE modular blower
- CA, CH and CS indoor coils

Accessories

- Standard room thermostat with 1-stage cool/1-stage heat
- Digital room thermostat with 1-stage cool/ 1-stage heat
- Outdoor Thermostat
- Low Ambient Kit



PRODUCT SPECIFICATIONS

SPECIFICATIONS

	CRT18-1	CRT24-1	CRT24-1A	CRT30-1	CRT36-1	CRT42-1	CRT48-1	CRT60-1
Capacities								
Nominal Cooling (BTU/h)	19,000	22,400	23,000	28,000	36,000	41,000	45,000	53,000
SEER	13	13	13	13	13	13	13	13
Decibels	78	74	78	74	74	74	74	74
Compressor								
RLA	6.2	9.6	7.7	12.2	14.8	16.6	18	22.1
LRA	35	45	40	63	83	95	104	137
Condenser Fan Motor								
Horsepower	1/6	1/6	1/6	1/6	¼	¼	¼	¼
FLA	1.5	0.9	1.5	1.1	1.6	1.6	1.6	1.6
Refrigeration System								
Liquid Valve Size ("O.D.")	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.")	¾"	¾"	¾"	¾"	¾"	⅞"	⅞"	⅞"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	94	99	102	107	140.12	125	145	139.13
Shipped with Orifice Size	0.055	0.055	0.059	0.065	0.074	0.080	0.082	0.088
Electrical Data								
Voltage-Phase	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Min. Circuit Ampacity ¹	9.3	12.9	11.2	16.4	20.1	22.4	24.1	29.2
Max. Overcurrent Protection (amps) ²	15	20	15	20	30	30	40	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Power Supply Conduit Size	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Ship Weight (lbs)	173	173	208	208	209	258	270	271


* Up to 35' in equivalent line length

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

DIMENSIONS

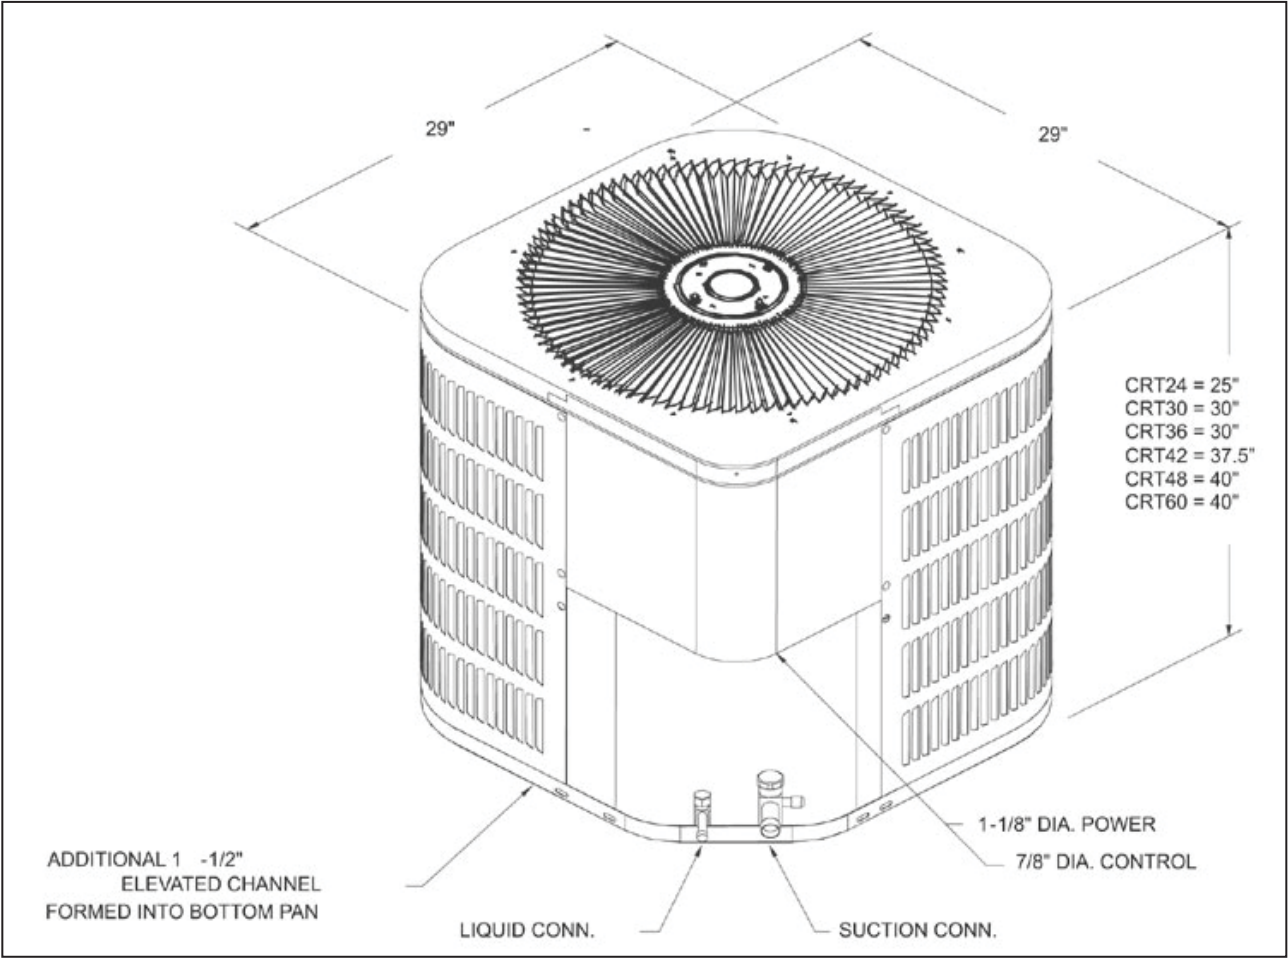

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT18-1*	AC18-XX	18,000	13,500	13	11.5	892879
	AC18-XX / ACNF18XX1A*	18,000	13,500	13	11.5	798615
	ACNF18XX1A*	18,000	13,500	13	11.5	893772
	ADPF18241A*	19,000	14,250	13	11.5	892787
	AEPF18301A*	19,000	14,250	14	12.2	892142
	AEPT030-00*-1*	19,000	14,250	14	12.2	798610
	ARPF036-00B-1*	19,000	14,250	13	11.5	823883
	ARPF18241A*	19,000	14,250	13	11.5	892220
	ARPT032-00*-1*	19,000	14,250	13	11.5	823880
	ARUF032-00*-1*	19,000	14,250	13	11.5	823885
	ARUF18241A*	19,000	14,250	13	11.5	891579
	AWB24-XX	18,000	13,500	13	11.5	798612
	AWUF18XX1A*	18,000	13,500	13	11.5	798613
	AWUF24XX1A*	18,000	13,500	13	11.5	892336
	CA*F030*2*+EEP	19,000	14,250	13	11.5	823881
	CA*F030*2*+G*V80704B**	19,000	14,250	14	12.2	798617
	CA*F030*2*+G*V90704C**	19,000	14,250	14	12.2	798614
	CA*F1824*6A*+EEP	19,000	14,250	13	11.5	891689
	CA*F1824*6A*+G*V80704B**	19,000	14,250	14	12.2	892862
	CA*F1824*6A*+G*V90704C**	19,000	14,250	14	12.2	892797
	CHPF030A2*+EEP	19,000	14,250	13	11.5	823878
	CHPF042B2*+G*V80704B**	19,600	14,700	14	12.2	798611
	CHPF042B2*+G*V90704C**	19,600	14,700	14	12.2	823879
	CHPF1824A6A*+EEP	19,000	14,250	13	11.5	892353
	CHPF2430B6A*+G*V80704B**	19,600	14,700	14	12.2	891940
	CHPF2430B6A*+G*V90704C**	19,600	14,700	14	12.2	891949
	CSCF1824N6A*+EEP	19,000	14,250	13	11.5	892642
	CSCF1824N6A*+G*V80704B**	19,000	14,250	14	12.2	892838
	CSCF1824N6A*+G*V90704C**	19,000	14,250	14	12.2	893058
	H36F+EEP	19,000	14,250	13	11.5	798616
	H36F+G*V80704B**	19,000	14,250	14	12.2	823884
	H36F+G*V90704C**	19,000	14,250	14	12.2	823882

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- Note: XX of a model designates Electric Heat Quantity.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT24-1	AEPF18301A*	22,400	16,800	14	12.5	891805
	AEPT030-00*-1*	22,400	16,800	14	12.5	539795
	ARPF18241A*	22,000	16,280	13	11.5	892309
	ARPT032-00*-1*	22,000	16,500	13	11.5	539710
	ARUF032-00*-1*	22,000	16,500	13	11.5	539784
	ARUF18241A*	22,000	16,500	13	11.5	892530
	AWB36-XX	22,000	16,500	13	11.5	539794
	AWUF36XX1A*	22,000	16,500	13	11.5	893179
	CA*F030*2*+G*V80704B**	22,000	16,200	14	12.5	551600
	CA*F037*2*+EEP	22,000	16,500	13	11.5	539334
	CA*F042*2*+G*V80704B**	22,400	16,800	14	12.5	551586
	CA*F042*2*+G*V90704C**	22,400	16,800	14	12.5	539819
	CA*F048*2*+EEP	22,400	16,800	13	11.5	539332
	CA*F1824*6A*+G*V80704B**	22,000	16,500	14	12.5	893159
	CA*F3030*6A*+EEP	22,000	16,280	13	11.5	891818
	CA*F3131*6A*+G*V80704B**	22,400	16,800	14	12.5	892136
	CA*F3131*6A*+G*V90704C**	22,400	16,800	14	12.5	892232
	CA*F3636*6A*+EEP	22,400	16,576	13	11.5	892870
	CHPF030A2*+EEP	22,000	16,500	13	11.5	539327
	CHPF030A2*+G*V80704B**	22,000	16,500	14	12.5	551602
	CHPF036B2*+EEP	22,400	16,800	13	11.5	539335
	CHPF042B2*+G*V80704B**	22,400	16,800	14	12.5	551576
	CHPF042B2*+G*V90704C**	22,400	16,800	14	12.5	539703
	CHPF1824A6A*+EEP	22,000	16,280	13	11.5	891705
	CHPF1824A6A*+G*V80704B**	22,000	16,500	14	12.5	892414
	CHPF2430B6A*+G*V80704B**	22,400	16,800	14	12.5	891811
	CHPF2430B6A*+G*V90704C**	22,400	16,800	14	12.5	892193
	CSCF1824N6A*+EEP	22,000	16,280	13	11.5	892331
	CSCF1824N6A*+G*V80704B**	22,000	16,500	14	12.5	891614
	CSCF1824N6A*+G*V90453B**	22,000	16,500	14	12.5	1008560
	CSCF3036N6A*+EEP	22,400	16,800	13	11.5	892731
	H36F+EEP	22,000	16,500	13	11.5	539321
	H36F+G*V80704B**	22,000	16,500	14	12.5	551568
	H36F+G*V90453B**	22,000	16,500	14	12.5	1008549
	H49F+EEP	22,400	16,800	13	11.5	539325

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT24-1*	AEPF18301A*	23,600	17,700	14	12.2	893128
	AEPT030-00*-1*	23,600	17,700	14	12.2	830395
	ARPF18241A*	23,000	17,250	13	11.5	892997
	ARPT032-00*-1*	23,000	17,250	13	11.5	830401
	ARUF032-00*-1*	23,000	17,250	13	11.5	830400
	ARUF18241A*	23,000	17,250	13	11.5	891753
	AWB36-XX	23,000	17,250	13	11.5	830396
	AWUF24XX1A*	21,000	15,750	13	11.5	1038151
	AWUF36XX1A*	23,000	17,250	13	11.5	891889
	CA*F030*2*+EEP	23,000	17,250	13	11.5	830404
	CA*F030*2*+G*V80704B**	23,000	17,250	14	12.2	830412
	CA*F030*2*+G*V90704C**	23,000	17,250	14	12.2	830405
	CA*F037*2*+EEP	23,400	17,550	13	11.5	830411
	CA*F037*2*+G*V80704B**	23,400	17,550	14	12.2	830409
	CA*F037*2*+G*V90704C**	23,400	17,550	14	12.2	830406
	CA*F042*2*+EEP	23,600	17,700	13	11.5	830408
	CA*F1824*6A*+EEP	23,000	17,250	13	11.5	893118
	CA*F1824*6A*+G*V80704B**	23,000	17,250	14	12.2	892132
	CA*F1824*6A*+G*V90704C**	23,000	17,250	14	12.2	892507
	CA*F3030*6A*+EEP	23,400	17,550	13	11.5	892882
	CA*F3030*6A*+G*V80704B**	23,400	17,550	14	12.2	891943
	CA*F3030*6A*+G*V90704C**	23,400	17,550	14	12.2	892590
	CA*F3131*6A*+EEP	23,600	17,700	13	11.5	892322
	CHPF030A2*+EEP	23,000	17,250	13	11.5	830397
	CHPF030A2*+G*V80704B**	23,000	17,250	14	12.2	830403
	CHPF042B2*+G*V80704B**	23,400	17,550	14	12.2	830410
	CHPF042B2*+G*V90704C**	23,400	17,550	14	12.2	830399
	CHPF1824A6A*+EEP	23,000	17,250	13	11.5	892307
	CHPF1824A6A*+G*V80704B**	23,000	17,250	14	12.2	892972
	CHPF2430B6A*+G*V80704B**	23,400	17,550	14	12.2	891638
	CHPF2430B6A*+G*V90704C**	23,400	17,550	14	12.2	891921
	CSCF1824N6A*+EEP	23,000	17,250	13	11.5	892148
	CSCF1824N6A*+G*V80704B**	23,000	17,250	14	12.2	1008557
	CSCF1824N6A*+G*V90704C**	23,000	17,250	14	12.2	892051
	CSCF3036N6A*+EEP	23,600	17,700	13	11.5	892255
	H36F+EEP	23,000	17,250	13	11.5	830398
	H36F+G*V80704B**	23,000	17,250	14	12.2	1008545
	H36F+G*V90704C**	23,000	17,250	14	12.2	830394
	H49F+EEP	23,600	17,700	13	11.5	830402

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT30-1*	AEPF30361A*	28,000	21,000	14	12.5	892623
	AEPT036-00*-1*	28,000	21,000	14	12.5	539698
	ARPF18241A*	26,600	20,216	13	11.5	892196
	ARPT032-00*-1*	26,600	20,100	13	11.5	539756
	ARUF032-00*-1*	26,600	20,100	13	11.5	539732
	ARUF18241A*	26,600	19,684	13	11.5	892272
	AWUF36XX1A*	27,400	20,550	13	11.5	1038148
	CA*F030*2*+EEP	26,600	20,100	13	11.5	539337
	CA*F030*2*+G*V80704B**	27,000	20,400	14	12.5	551567
	CA*F042*2*+EEP	27,000	20,250	13	11.5	539330
	CA*F042*2*+G*V80704B**	27,000	20,250	14	12.5	551598
	CA*F042*2*+G*V90704C**	27,000	20,250	14	12.5	539705
	CA*F1824*6A*+EEP	26,600	20,216	13	11.5	892735
	CA*F1824*6A*+G*V80704B**	27,000	20,250	14	12.5	892162
	CA*F3131*6A*+EEP	27,000	20,250	13	11.5	893173
	CA*F3131*6A*+G*V80704B**	27,000	20,250	14	12.5	892990
	CA*F3131*6A*+G*V90704C**	27,000	20,250	14	12.5	891609
	CHPF030A2*+EEP	26,600	20,100	13	11.5	539333
	CHPF030A2*+G*V80704B**	27,000	20,400	14	12.5	551579
	CHPF036B2*+EEP	27,000	20,250	13	11.5	539320
	CHPF042B2*+EEP	28,400	21,300	13	11.5	539329
	CHPF042B2*+G*V80704B**	27,000	20,250	14	12.5	551592
	CHPF042B2*+G*V90704C**	27,000	20,250	14	12.5	539803
	CHPF1824A6A*+EEP	26,600	20,216	13	11.5	892684
	CHPF1824A6A*+G*V80704B**	27,000	20,520	14	12.5	892400
	CHPF2430B6A*+EEP	28,400	21,300	13	11.5	891695
	CHPF2430B6A*+G*V80704B**	27,000	20,250	14	12.5	891591
	CHPF2430B6A*+G*V90704C**	27,000	20,250	14	12.5	892980
	CSCF1824N6A*+EEP	26,600	19,950	13	11.5	892226
	CSCF3036N6A*+EEP	28,400	21,300	13	11.5	891589
	CSCF3036N6A*+G*V80704B**	27,000	20,250	14	12.5	891912
	CSCF3036N6A*+G*V90704C**	27,000	20,250	14	12.5	892694
	H36F+EEP	26,600	20,100	13	11.5	539331
	H49F+EEP	28,400	21,300	13	11.5	539326
	H49F+G*V80704B**	27,000	20,250	14	12.5	551596
	H49F+G*V90704C**	27,000	20,250	14	12.5	539740

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT36-1*	AEPF30361A*	36,000	26,280	14	12.5	891598
	AEPT036-00*-1*	36,000	26,200	14	12.5	539684
	ARPF36421A*	36,000	26,280	13	11.5	892498
	ARPT049-00*-1*	36,000	26,200	13	11.5	539796
	ARUF048-00*-1*	36,000	26,200	13	11.5	539804
	ARUF36421A*	36,000	26,280	13	11.5	892127
	CA*F048*2*+EEP	36,000	26,200	13	11.5	539760
	CA*F048*2*+G*V80905C**	36,000	26,200	14	12.5	539686
	CA*F048*2*+G*V81155C**	36,000	26,200	14	12.5	539747
	CA*F048*2*+G*V90905D**	36,000	26,200	14	12.5	539725
	CA*F048*2*+G*V91155D**	36,000	26,200	14	12.5	539748
	CA*F3636*6A*+EEP	36,000	26,280	13	11.5	892144
	CA*F3636*6A*+G*V80905C**	36,000	26,280	14	12.5	891946
	CA*F3636*6A*+G*V81155C**	36,000	26,280	14	12.5	892952
	CA*F3636*6A*+G*V90905D**	36,000	26,280	14	12.5	892876
	CA*F3636*6A*+G*V91155D**	36,000	26,280	14	12.5	892243
	CHPF048D2*+EEP	36,000	26,200	13	11.5	539721
	CHPF048D2*+G*V80905C**	36,000	26,000	14	12.5	539706
	CHPF048D2*+G*V91155D**	36,000	26,200	14	12.5	539818
	CHPF3642D6A*+EEP	36,000	26,280	13	11.5	892651
	CHPF3642D6A*+G*V80905C**	36,000	25,920	14	12.5	891728
	CHPF3642D6A*+G*V91155D**	36,000	26,280	14	12.5	891635
	CSCF3642N6A*+EEP	36,000	25,560	13	11.5	891586
	CSCF3642N6A*+G*V80905C**	36,000	26,280	14	12.5	892426
	CSCF3642N6A*+G*V90905D**	36,000	26,280	14	12.5	892941
	CSCF4860N6A*+EEP	36,000	26,280	13	11.5	893013
	H60F+EEP	36,000	26,200	13	11.5	539766
	H60F+G*V80905C**	36,000	26,200	14	12.5	539738
	H60F+G*V90905D**	36,000	26,200	14	12.5	539812
	H61F+EEP	36,000	26,200	13	11.5	539811

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT42-1*	AEPF42601A*	41,000	29,930	14	12.5	891844
	AEPT060-00*-1*	41,000	30,000	14	12.5	539753
	ARPF36421A*	41,000	29,520	13	11.5	892312
	ARPT049-00*-1*	41,000	30,000	13	11.5	539759
	ARUF049-00*-1*	41,000	30,000	13	11.5	539692
	ARUF36421A*	41,000	29,930	13	11.5	892804
	CA*F061*2*+EEP	41,000	30,000	13	11.5	539767
	CA*F061*2*+G*V80905C**	41,000	30,000	14	12.5	539691
	CA*F061*2*+G*V81155C**	41,000	30,000	14	12.5	539724
	CA*F061*2*+G*V90905D**	41,000	30,000	14	12.5	539799
	CA*F061*2*+G*V91155D**	41,000	30,000	14	12.5	539791
	CA*F4860*6A*+EEP	41,000	29,930	13	11.5	892110
	CA*F4860*6A*+G*V80905C**	41,000	29,930	14	12.5	891634
	CA*F4860*6A*+G*V81155C**	41,000	29,930	14	12.5	893039
	CA*F4860*6A*+G*V90905D**	41,000	29,930	14	12.5	892544
	CA*F4860*6A*+G*V91155D**	41,000	29,930	14	12.5	893061
	CHPF060D2*+EEP	41,000	30,000	13	11.5	539697
	CHPF060D2*+G*V80905C**	41,000	30,000	14	12.5	539769
	CHPF060D2*+G*V81155C**	41,000	30,000	14	12.5	539789
	CHPF060D2*+G*V90905D**	41,000	30,000	14	12.5	539714
	CHPF060D2*+G*V91155D**	41,000	30,000	14	12.5	539781
	CHPF4860D6A*+EEP	41,000	29,930	13	11.5	891595
	CHPF4860D6A*+G*V80905C**	41,000	29,930	14	12.5	891842
	CHPF4860D6A*+G*V81155C**	41,000	29,930	14	12.5	892904
	CHPF4860D6A*+G*V90905D**	41,000	29,930	14	12.5	892968
	CHPF4860D6A*+G*V91155D**	41,000	29,930	14	12.5	891885
	CSCF4860N6A*+EEP	41,000	29,930	13	11.5	891992
	H61F+EEP	41,000	30,000	13	11.5	539816

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT48-1*	AEPF42601A*	44,500	33,375	13.5	12	891930
	AEPT060-00*-1*	44,500	33,400	13.5	12	539785
	ARPF36421A*	44,000	33,000	13	11.5	892369
	ARPT049-00*-1*	44,000	33,000	13	11.5	539730
	ARUF049-00*-1*	44,000	33,000	13	11.5	539720
	ARUF36421A*	44,000	33,000	13	11.5	892170
	CA*F061*2*+EEP	45,000	33,700	13	11.5	539737
	CA*F061*2*+G*V80905C**	45,000	33,700	13.5	12	539733
	CA*F061*2*+G*V81155C**	45,000	33,700	13.5	12	539702
	CA*F061*2*+G*V90905D**	45,000	33,700	13.5	12	539764
	CA*F061*2*+G*V91155D**	45,000	33,700	13.5	12	539754
	CA*F4860*6A*+EEP	45,000	33,750	13	11.5	892222
	CA*F4860*6A*+G*V80905C**	45,000	33,750	13.5	12	892411
	CA*F4860*6A*+G*V81155C**	45,000	33,750	13.5	12	891770
	CA*F4860*6A*+G*V90905D**	45,000	33,750	13.5	12	891855
	CA*F4860*6A*+G*V91155D**	45,000	33,750	13.5	12	892604
	CHPF060D2*+EEP	45,000	33,700	13	11.5	539788
	CHPF060D2*+G*V80905C**	45,000	33,700	13.5	12	539731
	CHPF060D2*+G*V81155C**	45,000	33,700	13.5	12	539763
	CHPF060D2*+G*V90905D**	45,000	33,700	13.5	12	539782
	CHPF060D2*+G*V91155D**	45,000	33,700	13.5	12	539741
	CHPF4860D6A*+EEP	45,000	33,750	13	11.5	891862
	CHPF4860D6A*+G*V80905C**	45,000	33,750	13.5	12	891714
	CHPF4860D6A*+G*V81155C**	45,000	33,750	13.5	12	891749
	CHPF4860D6A*+G*V90905D**	45,000	33,750	13.5	12	891982
	CHPF4860D6A*+G*V91155D**	45,000	33,750	13.5	12	892621
	CSCF4860N6A*+EEP	45,000	33,750	13	11.5	892586
	CSCF4860N6A*+G*V81155C**	45,000	33,750	13.5	12	892845
	CSCF4860N6A*+G*V91155D**	45,000	33,750	13.5	12	893106
	H61F+EEP	45,000	33,700	13	11.5	539743
	H61F+G*V81155C**	45,000	33,700	13.5	12	539773
	H61F+G*V91155D**	45,000	33,700	13.5	12	539758

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER ¹	EER ²	ARI #
		Total	Sensible			
CRT60-1*	AEPF42601A*	53,000	40,280	13	11.8	892696
	AEPT060-00*-1*	53,000	40,200	13	11.8	531546
	CA*F061*2*+EEP	52,000	39,700	13	11.5	531558
	CA*F061*2*+G*V80905C**	53,000	40,200	13.3	11.8	531555
	CA*F061*2*+G*V81155C**	53,000	40,200	13.3	11.8	531557
	CA*F061*2*+G*V90905D**	53,000	40,200	13.3	11.8	531560
	CA*F061*2*+G*V91155D**	53,000	40,200	13.3	11.8	531535
	CA*F4860*6A*+EEP	52,000	39,520	13	11.5	892082
	CA*F4860*6A*+G*V80905C**	53,000	40,280	13.3	11.8	892672
	CA*F4860*6A*+G*V81155C**	53,000	40,280	13.3	11.8	892829
	CA*F4860*6A*+G*V90905D**	53,000	40,280	13.3	11.8	892673
	CA*F4860*6A*+G*V91155D**	53,000	40,280	13.3	11.8	892920
	CHPF060D2*+EEP	52,000	39,700	13	11.5	531540
	CHPF060D2*+G*V80905C**	53,000	40,200	13.3	11.8	531552
	CHPF060D2*+G*V81155C**	53,000	40,200	13.3	11.8	531538
	CHPF060D2*+G*V90905D**	53,000	40,200	13.3	11.8	531550
	CHPF060D2*+G*V91155D**	53,000	40,200	13.3	11.8	531537
	CHPF4860D6A*+EEP	52,000	39,520	13	11.5	892966
	CHPF4860D6A*+G*V80905C**	53,000	40,280	13.3	11.8	892038
	CHPF4860D6A*+G*V81155C**	53,000	40,280	13.3	11.8	892776
	CHPF4860D6A*+G*V90905D**	53,000	40,280	13.3	11.8	892700
	CHPF4860D6A*+G*V91155D**	53,000	40,280	13.3	11.8	892769
	CSCF4860N6A*+EEP	52,000	39,520	13	11.5	892338
	CSCF4860N6A*+G*V81155C**	53,000	40,280	13.3	11.8	892559
	CSCF4860N6A*+G*V91155D**	53,000	40,280	13.3	11.8	892783
	H61F+EEP	52,000	39,700	13	11.5	531534
	H61F+G*V81155C**	53,000	40,200	13.3	11.8	531543
	H61F+G*V91155D**	53,000	40,200	13.3	11.8	531561

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]

NOTES

- 1) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 2) Note: XX of a model designates Electric Heat Quantity.
- 3) EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

ACCESSORIES

Item #	Accessory Description
CHT18-60 or CHSATG)	Standard room thermostat with 1-stage cool/1-stage heat
CH70TG	Digital room thermostat with 1-stage cool/1-stage heat
OT18-60A	Outdoor Thermostat
LA-01	Low Ambient Kit



Air Conditioning & Heating

Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

*Copyright © 2006 • Goodman Manufacturing Company, L.P. • Houston, Texas
Goodman® brand products are proudly made in the USA.
Printed in the USA.*