

INSTRUCTIONS FOR WILLIAMS GAS APPLIANCE CONVERSON KITS 8931, 8932, 8933 & 8934 NATURAL GAS TO LIQUID PROPANE GAS

THIS KIT IS FOR USE WITH MODEL NUMBERS:

WARNING

This conversion kit shall be installed by a qualified service agency in accordance with the manufacturer's instructions and all applicable codes and requirements of the authority having jurisdiction. If the information in these instructions is not followed exactly, a fire, explosion or production of carbon monoxide may result, causing property damage, personal injury or loss The qualified service agency is responsible for the proper installation of this kit. The installation is not proper and complete until the operation of the converted appliance is checked as specified in the manufacturer's instructions supplied with the kit.

CAUTION: THE GAS SUPPLY SHALL BE SHUTOFF PRIOR TO DISCONNECTING THE ELECTRICAL POWER (IF EQUIPPED WITH BLOWER) BEFORE PROCEEDING WITH THE CONVERSION.

WARNING: IF THE INFORMATION IN THIS MANUAL IS NOT FOLLOWED EXACTLY, A FIRE OR EXPLOSION MAY RESULT CAUSING PROPERTY DAMAGE, PERSONAL INJURY OR LOSS OF LIFE.

THIS KIT CONTAINS:

(1) PRESSURE REGULATOR (4) PILOT ORIFICES (L.P. GAS)

(1) BURNER ORIFICE (L.P. GAS)

(2) CONVERSION LABELS

(2) SCREWS

(1) L.P.G. TAG

2001622; 2001621; 3501522; 3501922; 3501521; 3501921; 5001522; 5001922; 5001521; 5001921; 5002522; 5002922; 5002521; 5002921; 6501522; 6501922; 6501521; 6501921; 6502522; 6502922; 6502521: 6502921

THIS CONVERSION KIT IS TO BE USED ON MODELS: 2001622; 2001621; 3501522; 3501922; 3501521; 3501921; 5001522; 5001922; 5001521; 5001921; 5002522; 5002922; 5002521; 5002921; 6501522; 6501922; 6501521; 6501921; 6502522; 6502922; 6502521; 6502921, MANUFACTURED FOR USE WITH PROPANE GAS AND EQUIPPED WITH GAS VALVE PART NUMBER 6003 ONLY.

> MANUFACTURED FOR: WILLIAMS FURNACE COMPANY COLTON, CA. USA (909) 825-0993 6003 NAT 4" W.C. MAX. 1/2 P.S.I. FOR MILLIVOLT SYSTEM ONLY REPLACEMENT PART NO. P323011 MADE IN TAIWAN

WARNING: THE WILLIAMS CONVERSION KIT NUMBERS 8931, 8932, 8933, 8934, CAN ONLY BE USED ON THE MODEL GAS VALVE 6003 AND MUST NEVER BE USED ON ANY OTHER BRAND OF GAS VALVES. DO NOT USED THIS CONVERSION KIT ON ROBERTSHAW BRAND GAS VALVES. IF YOU ARE UNABLE TO DETERMINE THE GAS VALVE MODEL NUMBER, DO NOT CONVERT YOUR FURNACE.


CONVERSION INSTRUCTIONS - NATURAL GAS TO L.P. GAS

- Shut off gas to the furnace.
- 2. Shut off electric power to the furnace (If equipped with blower).
- 3. Disconnect gas supply line from control valve.
- 4. Disconnect thermostat wires from control valve.

CAUTION: Label all wires prior to disconnection for proper reconnection.

- Remove burners by unscrewing (2) Phillips head screws.
- Use a boxed end wrench and remove the main burner orifices (2) from the manifold and replace with the orifices provided in this kit. See Figure on page 2.
- Remove pilot orifices from pilot and replace with orifice provided in this kit. See Figure 2A, B. 7.
- To replace the pressure regulator on the gas valve. Refer to Figure 1.
- Push in gas control knob slightly and turn clockwise to "OFF".
- 10. Remove (2) screws from the pressure regulator.
- 11. Lift the pressure regulator and gasket from valve and discard.
- 12. Install the new gasket, pressure regulator and (2) screws from this conversion kit. IMPORTANT: Discard old gasket and screws. Do not reuse.
- 13. IMPORTANT: Check the location of the pilot to the burner. See Figure 4.
- 14. Reassemble the furnace by following Steps 1 thru 5 in reverse order.

P323075/LA917-72 1 OF 4 REV. 10/99

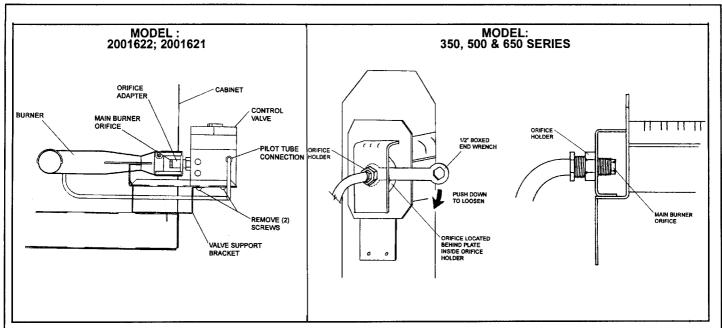





FIGURE 2

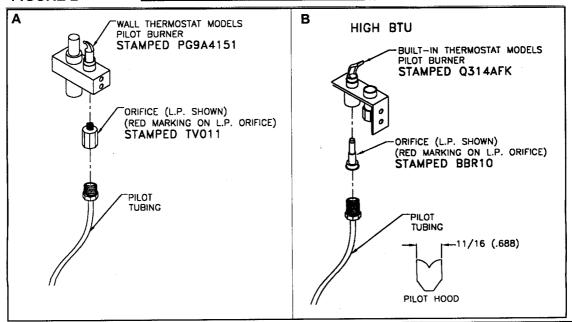


		TO BE USED ON CONVERSION LABEL					
KIT NO.	M ODEL NO. ON RATING PLATE*	NEW MODEL NO.	NEW INPUT BTU/HR	NEW HEATING CAPACITY BTU/HR	NEW ORIFICE SIZE		
7681	2001622	2001621	20,000	16,000	#56		
7682	3501522; 3501922	3501521; 3501921	35,000	26,250	#52		
7002	3502522; 3502922	3502521; 3502921	35,000	26,250	#52		
7683	5001522; 5001922	5001521; 5001921	50,000	37,500	#47		
7003	5002522; 5002922	5002521; 5002921	50,000	37,500	#47		
7684	6501522; 6501922	6501521; 6501921	65,000	50,400	#43		
	6502522; 6502922	6502521; 6502921	65,000	50,400	#43		

IMPORTANT: LABEL PLACEMENT

After conversion is completed, the large conversion label provided in this kit must be filled out completely (using chart information). Attach small conversion label to gas valve, and attach large data conversion label to inside of casing door next to rating plate. Remove "Natural Gas" tag from burner and replace with "Liquid Propane Gas" tag provided with this kit. This is necessary to provide information for future servicing. Failure to do so could result in property damage, personal injury or death.

FIGURE 4

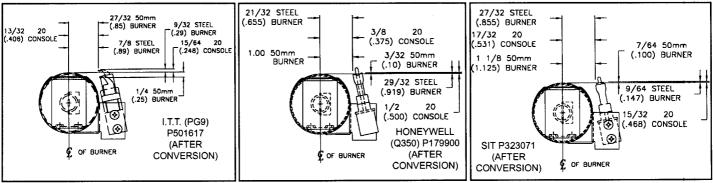

Refer to the Lighting and Operating Instruction Plate located in control area of furnace for instructions on lighting the burner.

WARNING

Any adjustments must be performed by a qualified service technician only. Improper adjustments could result in property damage, personal injury or death. The following information is provided for use by a qualified service technician

With main burner in operation, check all pipe connections, pilot gas tubing and around pressure regulator for gas leaks with a rich soap and water solution. Bubbles indicate gas leakage. Never use a match or open flame to test for leaks. Correct even the slightest leak at once before using furnace.

ADJUST PILOT BURNER

NOTE: Pilot gas may need adjustment depending on inlet pressure, increase or decrease to obtain proper setting.

Pilot flame should surround 3/8 inch to 1/2 inch of the generator tip. To adjust, remove pilot adjustment cap.

- 1. Remove screw cover over pilot adjusting screw.
- 2. Insert small screwdriver. Adjust flame as needed. Turn screw counterclockwise to increase flame or clockwise to decrease flame.
- Turn thermostat to highest setting. Main burner should light quickly and smoothly. Turn thermostat to lowest setting. Main burner should go out. Pilot should remain lit.
- 4. Replace screw cover over pilot adjusting screw.

WARNING

DANGER OF PROPERTY DAMAGE, BODILY INJURY OR DEATH.

Liquid Petroleum (L.P.) is heavier than air and it will settle in any low area, including open depressions, and it will remain there unless area is ventilated. Never attempt startup of unit before thoroughly ventilating area.

WARNING

The surface of the furnace is hot during operation. Keep children, clothing, furniture and flammable material away from it.

Do not store or use gasoline or other flammable liquids or vapors near the furnace.

CHECK GAS PRESSURE

The minimum inlet pressure in the gas supply pipe should be 5.0" w.c. for Propane Gas. The maximum inlet pressure should never exceed 7.0" w.c. This should be checked at the 1/8 inch N.P.T. plugged tapping in the supply line with a manometer.

The manifold pressure for this appliance is 4.0" w.c. for Propane Gas. Check with a manometer at the pressure tap on the control valve. To adjust pressure, remove cap from regulator and turn regulator adjustment screw to increase and counterclockwise to decrease pressure. clockwise /

RATE VERIFICATION

Refer to the Lighting and Operating Instruction Plate located in control area of furnace for instructions on lighting the

- 1. Make certain there is no gas flow through the meter other than to the appliance being checked. Other appliances must remain off and the pilots extinguished (or their consumption deducted from the meter reading).
- 2. With gas control knob in "ON" position, cycle main burner on and off several times by means of thermostat to stabilize pressure regulator valve (PRV) diaphragm.
- 3. With second hand on watch, carefully clock gas meter to determine exact rate of gas flow to main burner in cubic feet per hour (see CONVERSION TABLE below).
- 4. Compare actual input with manufacturer's recommended hourly input stamped on rating plate. Convert BTU per hour input rating to cubic feet of gas per hour (cfh) by using the following formula.

Where as:

PRV = Pressure Input Rating in BTU per Hour _

Cubic Feet of

Regulator Valve

BTU Content of Gas per cu ft

Gas per Hour

MJ = Megajoule Input Rating in MJ/hr

m3/hr

Metric Cube m3 =

MJ of Gas per m3

- 5. If actual gas flow (cfh) does not conform to manufacturer's recommended input rating (cfh or BTU converted to cfh), a limited adjustment of the PRV may be made. Turn PRV adjusting screw clockwise / ito increase or counterclockwise / to decrease gas flow. Burner input must not exceed nameplate rating.
- 6. Replace cap screw in PRV adjustment stack. Turn gas supply to other appliances back on and re-light all pilots.
- 7. Place furnace in operation and observe through at least one complete cycle to be sure all controls are operating satisfactorily.

CONVERSION TABLE

This table shows the gas flow rate for measured time per revolution of the ONE CUBIC FOOT DIAL in cubic feet per hour (cfh) and m3/hr.

TIME	FLOW	FLOW	TIME	FLOW	FLOW	TIME	FLOW	FLOW
sec	cfh	m3/hr	sec	cfh	m3/hr	sec	cfh	m3/hr
40	90	2.55	56	64	1.81	88	41	1.16
41	88	2.50	57	63	1.78	92	39	1.10
42	86	2.44	58	62	1.76	96	38	1.08
43	84	2.38	59	61	1.73	100	36	1.02
44	82	2.32	60	60	1.70	105	34	.96
45	80	2.27	62	58	1.64	110	33	.93
46	78	2.21	64	56	1.59	115	31	.88
47	77	2.18	66	54	1.53	120	30	.85
48	75	2.12	68	53	1.50	125	29	.82
49	73	2.07	70	51	1.44	130	28	.79
50	72	2.04	72	50	1.42	135	27	.76
51	71	2.01	74	49	1.39	140	26	.74
52	69	1.95	76	47	1.33	150	24	.68
53	68	1.93	78	46	1.30	160	23	.65
54	67	1.90	80	45	1.27	170	21	.59
55	65	1.84	84	43	1.22	180	20	.57

For 1/2 cu. ft. per revolution of meter dial, multiply flow rate by 2.

For 2 cu. ft. per revolution of meter dial, divide flow rate by 2.

IMPORTANT: LEAVE THESE INSTRUCTIONS WITH THE HOMEOWNER.