


Super Brute

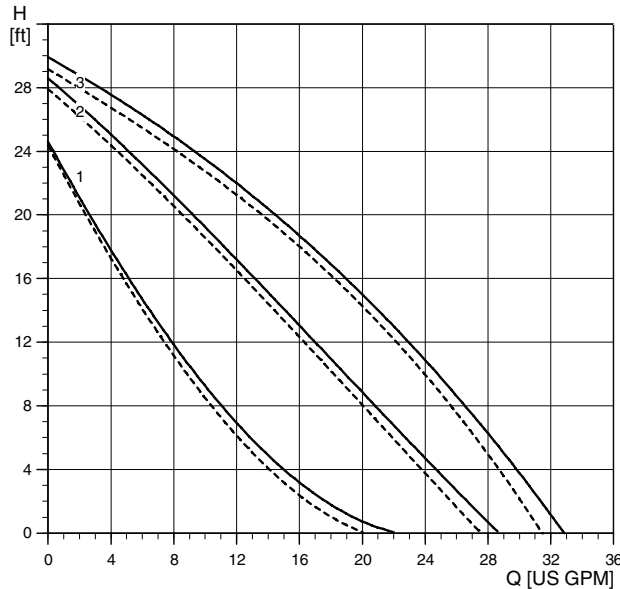

TM03 8195 2006

Flow range: 0-33 U.S. gpm
Head range: 0-29 feet
Motors: 2-pole, single-phase
Max. liquid temperature: 230 °F (110 °C)
Min. liquid temperature: 36 °F (2 °C)
Max. system pressure: 145 psi


Model	Spd	Volts	Amps	Watts	Hp	Capacitor
UPS 26-99FC	3	115	1.8	197	1/6	20μF/180 V
	2		1.5	179	1/6	20μF/180 V
	1		1.3	150	1/6	20μF/180 V
UPS 26-99FC/BFC	3	230	0.9	196	1/6	5μF/400 V
	2		0.8	179	1/6	5μF/400 V
	1		0.7	150	1/6	5μF/400 V

— Without check valve

- - - With check valve


Position	System type	Description
3	Closed (FC) and open (BFC)	High speed
2	Closed (FC) and open (BFC)	Medium speed
1	Closed (FC) and open (BFC)	Low speed

UPS 26-99FC

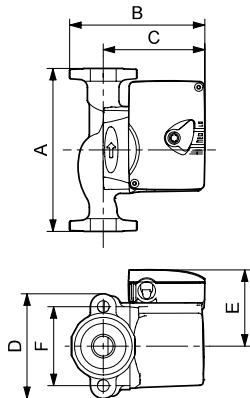

TM03 8757 2407

UPS 26-99BFC

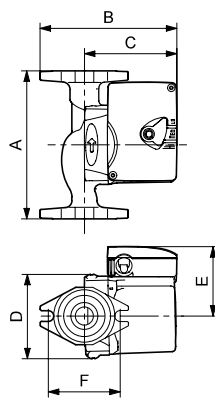

TM03 8531 1907

Model type	Product number		A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
	115 V	230 V								
UPS 26-99BFC	52722518	52722519	6 1/2	6	4 7/8	3 1/2	3 7/16	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt bores	10.3
UPS 26-99FC/BFC	52722512	52722513	6 1/2	6	4 7/8	3 1/2	3 7/16	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt bores	10.3

Note: The check valve can be removed.