

Wrap-Around Style Air Conditioner Filter

PREVENT®

"According to EPA research, 0.042 in. of dirt on an air conditioning coil can reduce its efficiency by 21%."

As published in Refrigeration Systems Magazine & on www.contractingbusiness.com

Dirty Coils Are Costing You Money... ...Prevent The Damage Before It's Too Late!

Debris clogged cooling fins and dirty coils reduce air flow, impair heat exchange and cause compressor run-on.

This means decreased equipment life with increased maintenance, repair and operating costs.

Close up
of Dirty Fins



- Attractively designed to fit **any** central air conditioning unit
Carrier®, Trane®, Lennox®, Armstrong®, Goodman®, York®, & others
- Low resistance to airflow .02 in. w.g.
Independent Testing ASHRAE 52.1 STANDARD @ 1200 CFM
- 5-Year Warranty
- No system modifications
- Easy to clean
- UV protected electrostatic media



Air Filter Units Classified By Underwriters Laboratories, Inc.
As to Flammability Only CLASS 2 650 U


PERMATRON®

AIR FILTRATION SINCE 1957

Preventing Equipment Damage is Easy!

This filter is designed to keep *any* central air conditioning unit from clogging up with outdoor debris caused by construction dust, dryer lint, bugs, seeds, leaves or clippings that get pulled into your equipment air intake!

Select the PreVent® Filter size closest to your unit size - 25"H x 80"L, 30"H x 100"L or 38"H x 110"L. Measure unit from top to bottom for height. Measure length of entire fin surface.

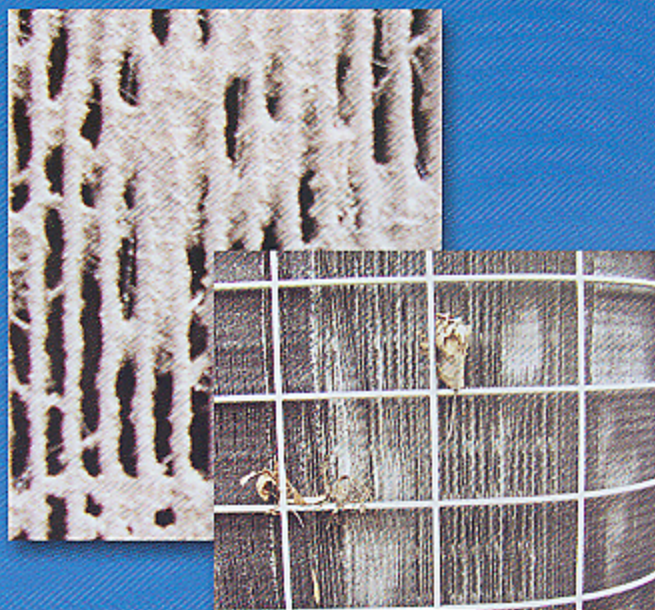

Installation Instructions



1. The enclosed filter wraps around the outside of the air intake louvers or fins of your air conditioning unit. Make sure your equipment is clean first. Wrap the filter around the unit, aligning the top edge of the filter with the top of the air conditioning unit. If the filter is taller than your unit, excess filter should be folded under at the bottom.
2. The filter is held in place across the rear of the unit by bungee cords (enclosed). Attach one each at the top, middle and bottom of the filter by hooking cord ends directly through the woven filter media. If the filter is longer than the circumference of your unit, excess filter may be folded under at the edges.



Maintenance and Cleaning:
Remove the filter from the unit monthly and rinse clean with water. Back flushing with garden hose recommended. Shake off excess water and reinstall filter with bungee hooks. Filter can be sprayed with mild detergent if necessary. Rinse thoroughly.



5-YEAR WARRANTY

Permatron takes pride in the quality and workmanship of our products. All are built to give years of trouble-free service. Any filter found to be defective in workmanship or materials, when returned to Permatron shipping charges prepaid, will be repaired or replaced without charge. The warranty period begins from the date of purchase and does not cover damage caused by excessive heat, disassembly, rough handling or improper installation. With proper care and regular cleaning, your Permatron filter should last many years. Permatron Corporation makes no medical claims other than that the filter will effectively remove particles from the air.

PERMATRON®

www.permatron.com