

Pipe Cover Installation Instruction






Rinnai.

To the installer

Model
PCD03-SM2


- This pipe cover box will fit any LS model except for the R63-LSe and R98-LS series.
- For your safety, always wear safety glasses and gloves.
- To use this product correctly and safely, please read and follow these assembly and installation instructions.
- Carefully unpack and identify each component before attempting to assemble.
Refer to Parts List.

Parts List

① Top Frame 1pc.	④ Right Plate 1pc.	⑥ Metal Bracket 2pcs.	⑩ Plastic Washer 10pcs.
			 M4
② Bottom Frame 2pcs.		⑦ Clip 2pcs.	⑪ Screw 2pcs.
			 M5X8
③ Left Plate 1pc.	⑤ Front Panel 1pc.	⑧ Screw 4pcs.	⑫ Screw 2pcs.
		 M4X12	 ø4.8X32
		⑨ Screw 6pcs.	⑬ Wall Anchor 2pcs.
		 M4X8	


Pipe Cover Assembly Instructions

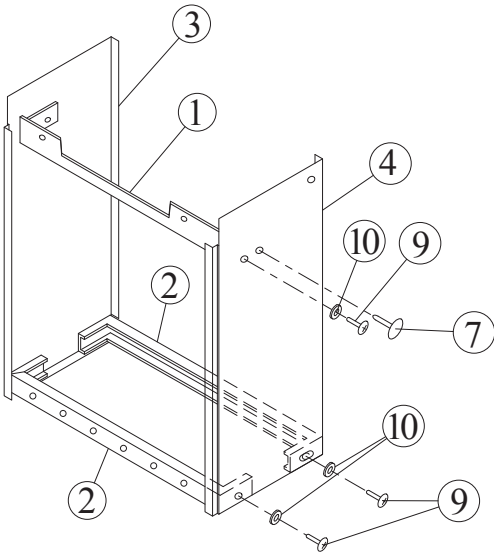- (1) Assemble the Top Frame ① to the Left and Right Plates ③ & ④ with clip ⑦. Secure these parts with screws and plastic washers ⑨ & ⑩.
- (2) Secure the two Bottom Frames ② to the Left and Right Plates ③ & ④ with screws and plastic washers ⑨ & ⑩.




Pipe Cover Installation

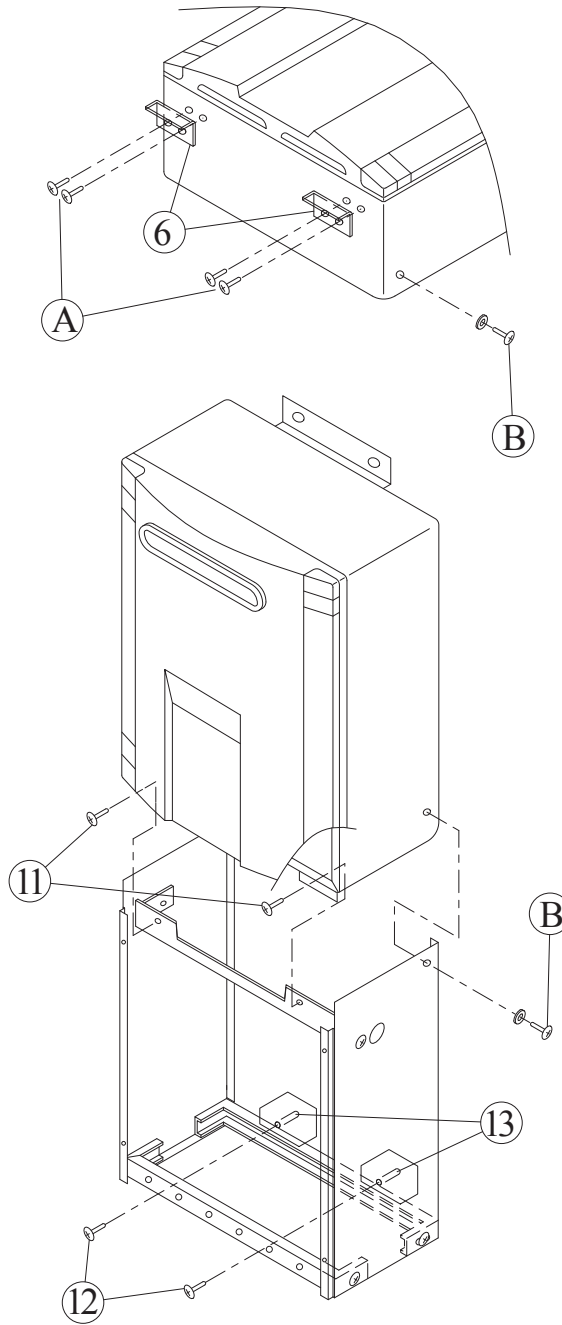- (1) Remove the mounting screws ① & ② from the bottom and sides of the appliance.
- (2) Install the two Metal Brackets ⑥ to the bottom of the appliance with the screws ① removed in step 1.
- (3) Slide the Pipe Cover assembly onto the bottom of the appliance. Align the mounting holes and temporarily mount the Pipe Cover with the screws ② removed from the sides of the appliance in step 1, and screws ⑪.
- (4) Loosen the screws on the "back" Bottom Frame. Then mark the locations to attach the Pipe Cover to the wall.
- (5) Remove the Pipe Cover and drill two holes in the wall as marked. For drywall, drill two 3/16-in. holes (other wall material may require alternate mounting details).
- (6) Gently tap the wall anchors ⑬ into the drilled holes until flush with the wall.
- (7) Slide the Pipe Cover assembly onto the bottom of the appliance. Align the mounting holes and attach the Pipe Cover with the screws ② removed from the sides of the appliance in step 1, and screws ⑪.
- (8) Attach the Pipe Cover to the wall with two screws ⑫.



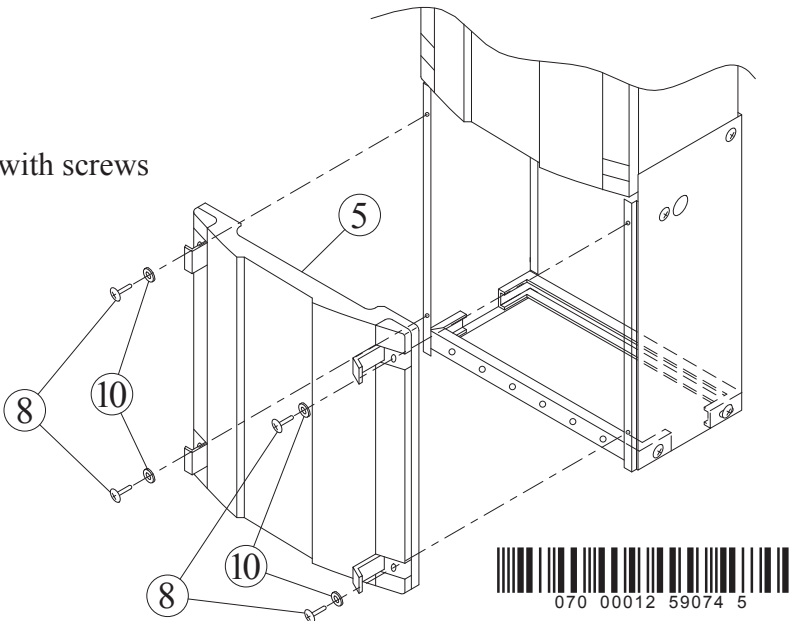- (9) Attach the Front Panel ⑤ to the Pipe Cover with screws and plastic washers ⑧ & ⑩.
- (10) With the Pipe Cover flush with the appliance, tighten the screws on the "back" Bottom Frame.



U287-1040(00)