



Model NR111 Series Residential Tankless Water Heater Specification Sheet

- **Standard Input** - gas consumption ranges from 11,000 BTUh to 250,000 BTUh
- **Capacity Range** - flow rates from 0.5 gpm up to 11.1 gpm
- **Compact Design** - ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted indoors (-SV and -DV models only) or installed outdoors with an -OD model
- **Durable Steel Casing with Polyester Coating**
- **Heat Exchanger** - manufactured with commercial grade copper, 25% thicker piping than standard models
- **Venting Options** - available in Power Vent (-SV), Outdoor (-OD), or Direct Vent (-DV) model that requires 4" Category III stainless steel pipe
- **Direct Electronic Ignition**
- **Quick-Connect** - two identical units can be linked together by using the optional Quick Connect Cord for twice the hot water capacity
- **Thermal Efficiency** - 84% efficient for use with natural gas or propane
- **Temperature Controls** - includes remote thermostat that can precisely adjust the output temperature from 100°F to 180°F
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freeze Protection
- **Additional Features** - Temperature Lockout, High Elevation Adjustment
- **12-Year* Limited Heat Exchanger Warranty for Residential Use**
- **5-Year Limited Parts Warranty**
- **Approvals** - CSA, UPC**, NSF, Low NOx Approved By SCAQMD (Rule 1146.2), Suitable for Installation in a Manufactured (Mobile) Home***



Model

NR111 - _____

- ☐ SV (Standard Vent)
- ☐ OD (Outdoor Vent)
- ☐ DV (Direct Vent)

Accessories

- ☐ Outdoor Vent Cap for -SV Model (#VC-4-1)
- ☐ Isolator Valves (#IK-WV-8)
- ☐ Pipe Cover (#PC-3S)
- ☐ Quick Connect Cord (#QC-1)
- ☐ Recess Box for OD Model (#RB-900)




* 3-Year Heat Exchanger warranty if supplied with pre-heated or circulated water, refer to the Noritz Limited Warranty for complete coverage details

** This product complies with California AB 1953 Low Lead Law

*** Manufactured (Mobile) Home approval is valid for **OD** and **DV** models only

Dimensions

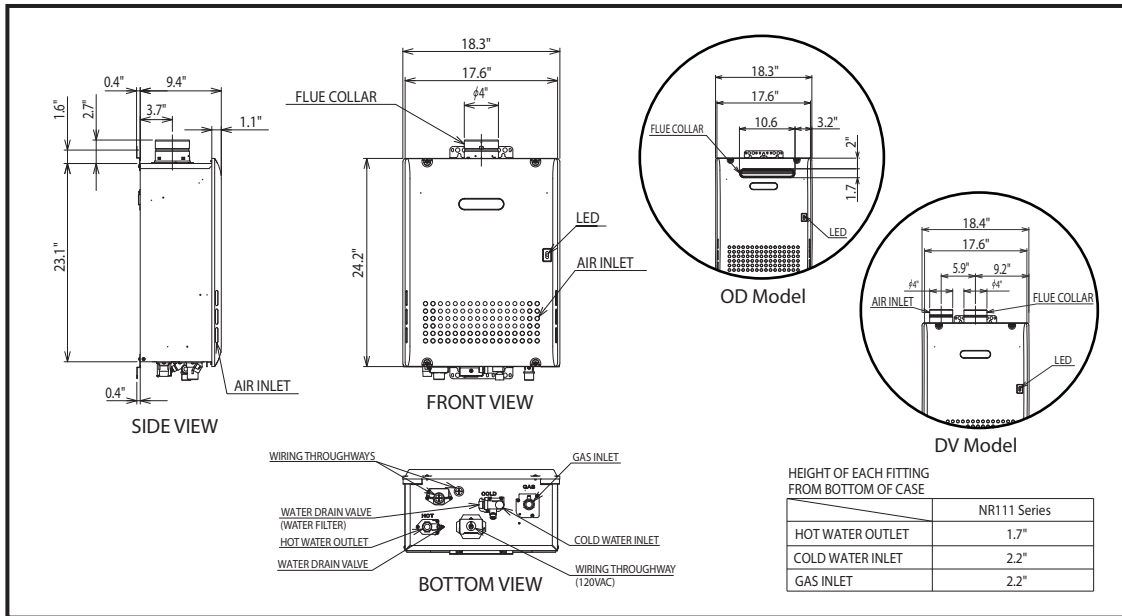


Flow Rates

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100
Flow Rate (GPM)	11.1	10.5	9.3	8.4	7.0	6.0	5.3	4.7	4.2

For peak flow rates in shaded areas, contact Noritz for proper setting

Pressure Loss

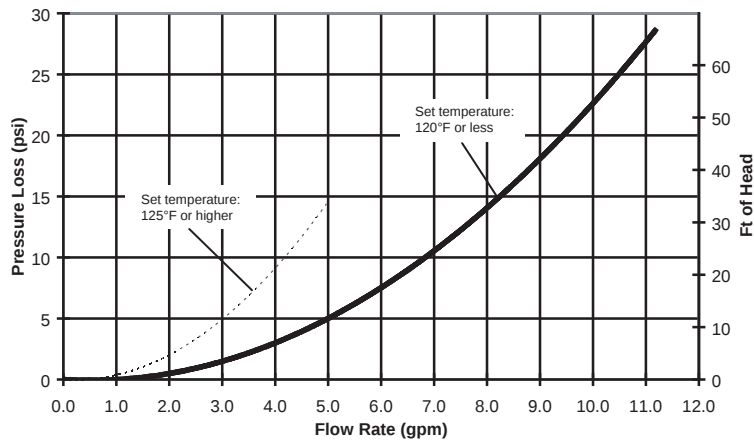

Specifications

Model Name		NR111-SV	NR111-OD	NR111-DV
Weight		62 (pounds)		
Water Holding Capacity		0.3 Gallon		
Connection Sizes	Water Inlet	3/4"		
	Hot Water Outlet	3/4"		
	Gas Inlet	3/4"		
Power	Supply	120VAC (60Hz), less than 3 amperes		
	Consumption	NG: 62W LP: 75W Freeze Prevention 145W	NG: 64W LP: 77W Freeze Prevention 145W	NG: 85W LP: 100W Freeze Prevention 161W
Freeze Protection		Indoor: -30°F Outdoor: -4°F	Outdoor: -4°F	Indoor: -30°F
Temperature Settings		100-150°F (In 5°F intervals), 160°F, 170°F, *180°F (14 Options)		
Default Temperature Options		120, 130, 140, *180°F (Default is 120°F)		

*181.4°F actual output temperature