

5


4

3


2

1

C

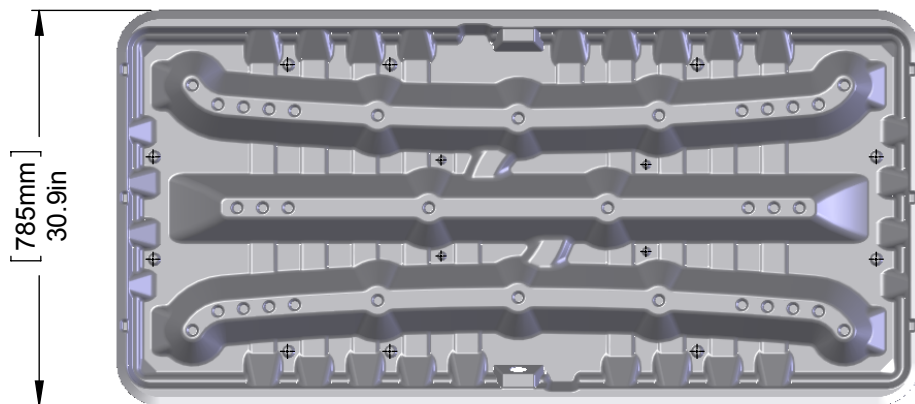


B

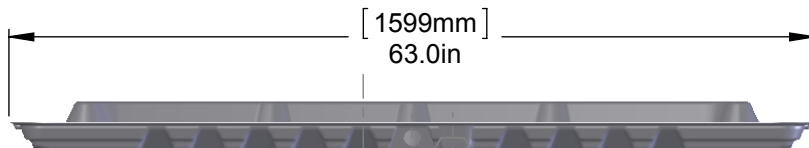

C

B

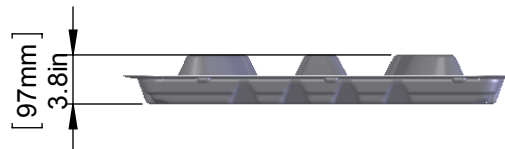

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- DexElar Material is UL-94 5VA
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm .032$
ANGULAR: MACH $\pm .5^\circ$ BEND $\pm 2^\circ$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	7/21/09
CHECKED BY ENG.	JK	7/21/09
ENG APPR.	CC	7/21/09
MFG APPR.	CC	7/21/09

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
RESOURCE CONSERVATION
TECHNOLOGIES, INC. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF RESOURCE
CONSERVATION TECHNOLOGIES IS
PROHIBITED.

RESOURCE
CONSERVATION TECHNOLOGIES
64208 PARKLAND DRIVE SUITE 102
SARASOTA, FL 34243 888-708-6622

TITLE:

AG-G 30x62 SPECIFICATIONS SHEET

SIZE
A

SCALE: 1:15

SHEET 1 OF 1

A

5

4

3

2

1