

FQ80

Item no. **483737**

Document type: **Product card**

Document date: **2014-05-09**

Generated by: **Systemair Online Catalogue**

Description

- Low profile grille fastened with torsion springs
- Thermal overload protection
- Title 24 Compliant
- UL Listed for use over a tub/shower with a GFCI branch circuit wiring
- The Home Ventilating Institute has certified all models for sound and air performance.

The FQ Series exhaust fans and fan lights provide remarkably quiet, energy efficient ventilation for baths, powder rooms and other areas. Fans are designed for intermittent or continuous operation to meet **ASHRAE Standard 62.2**.

Unlit models are ENERGY STAR® qualified, Title 24 compliant and meet the Washington State Ventilation and Indoor Air Quality Code.




Technical parameters

Voltage	120	V
Frequency	60	Hz
Phase	1	~
Power	25	W
Max. airflow	94.7	cfm
Weight	12	lbs.
Loudness	< 0.3	Sone
Certificate	cULus, HVI, Energy Star, California Title 24	

Performance


Diagrams

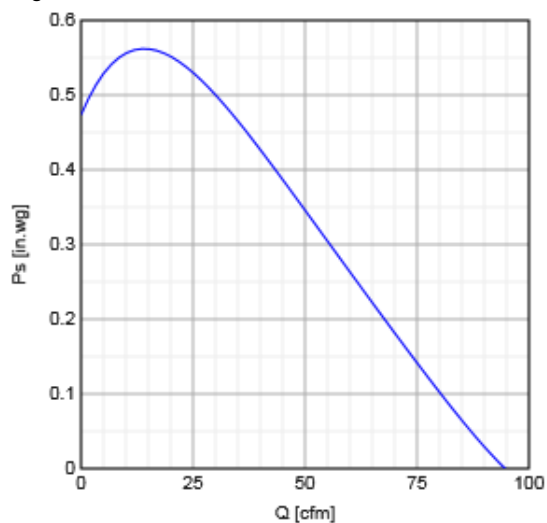

Hydraulic data

	Working point						
	Q [cfm]	Ps [in.wg]	P [W]	n [r.p.m.]	I [A]	SFP [W/l/s]	U [V]
Max efficiency	▲	-	▲	-	▲	-	-

Dimensions

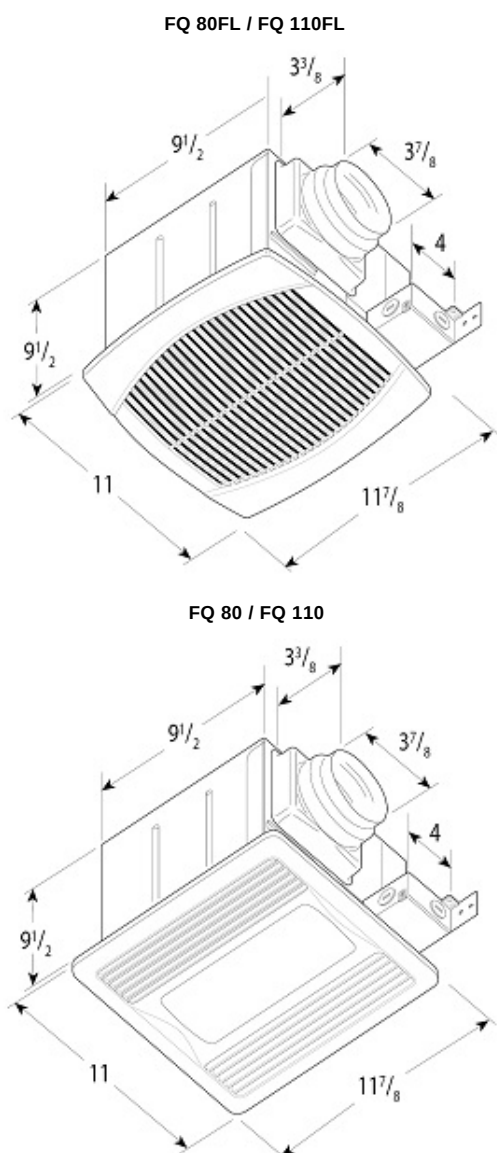

Accessories

Electric accessories

FD 60EM (411386)
FLD60 (411388)

Accessories

FQ-FD Fire Damper (46975)
HS4W,Hood,Plastic,Exhaust,4" (411072)

Documentation

-  [\(483431 FQ IOM EN FR ES.pdf, 900kB\)](#)
-  [\(413671 FQ Quiet Ventilating Fans EN.pdf, 1MB\)](#)
-  [\(413681 FQ Quiet Ventilatin Fans FR.pdf, 1MB\)](#)



(412220 Ventilation Solutions - Bathrooms EN.pdf, 7MB)