



## McDaniel Metals, Inc.

1318 Buschong  
Houston, Texas 77039  
Phone (281) 987-8400  
Fax (281) 987-9494


1. Open package and inspect to ensure that all pieces are included.

Package should include the following;


- 4) 14 1/2" frame pieces
- 25') gasket material
- 2) small duct support
- 1) large duct support

2. Layout curb parts as shown in diagram. *Insert 'TAB' sides into 'SLOTTED' sides making sure all flanges face outwards.*
  3. Insert duct support pieces on top lip of curb making sure the supply side of the long duct support ( *marked with an 's'* ) is on the right as shown.
  4. Level and square curb. *To insure the curb is square the diagonal measurements must be within 1/8".*
  5. Cut gasket material to length and apply to top of curb pieces. *Make sure duct support pieces have an airtight seal between supply and return.*
  6. Drop duct into openings formed by duct support pieces. You are now ready to set the unit.
- NOTE: DUCT SIZE SHOULD BE 3/8" LESS THAN O.D. OF DUCT OPENING.**

PGC101-103  
 ROOF CURB  
 FOR GOODMAN/AMANA  
 GPG-/APG-GAS PAC  
 2-5 TON PACKAGE UNITS

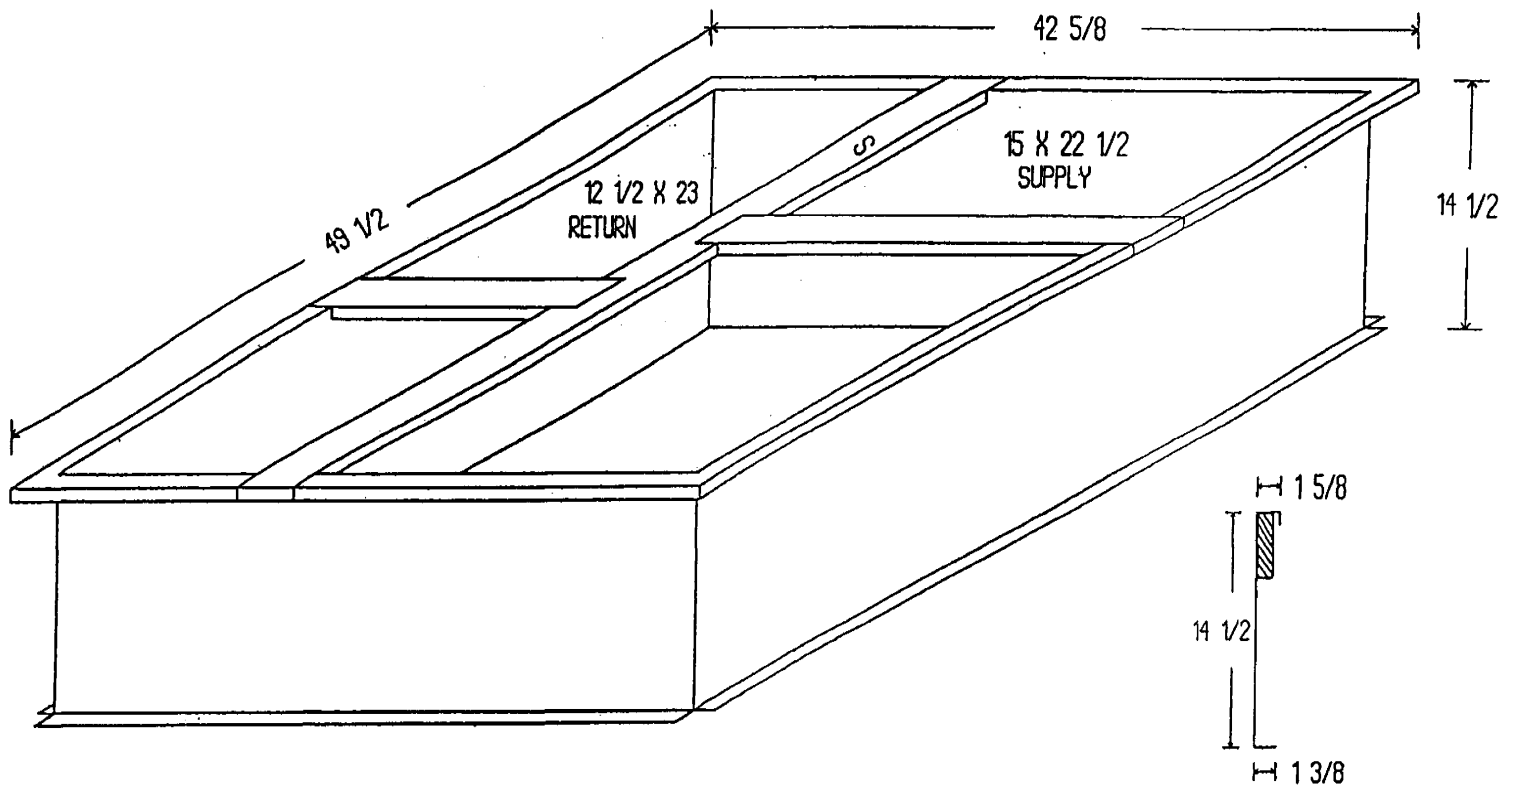

CONSTRUCTED OF 18 GAUGE GALVANIZED STEEL  
 1X4 WOOD RUNNER ATTACHED TO CURB TOP  
 SHIPPED UNASSEMBLED WITH INSTRUCTIONS

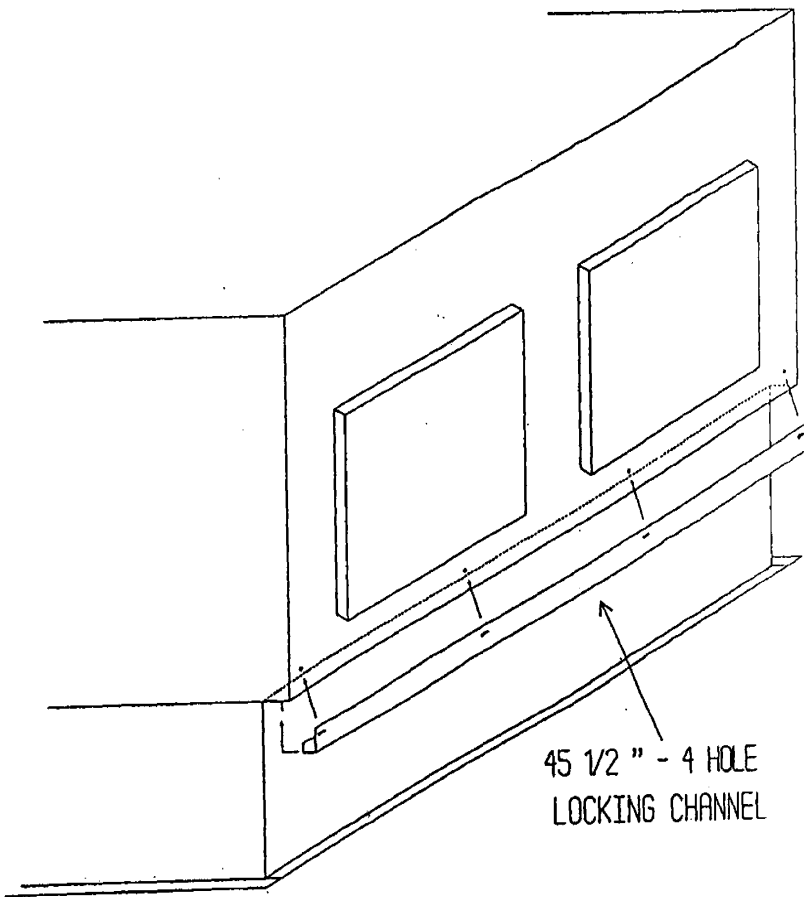

## LOCKING CHANNEL INSTALLATION

- 1) Remove screws from unit per diagram.
- 2) Line up channel slots with screw holes. Make sure channel flange is behind curb flange as shown in diagram.
- 3) Secure channel to unit using screws removed in step 1.

