





Technical Features of  
*Blueridge PTAC Series*

April 2013

➤ Air exchange

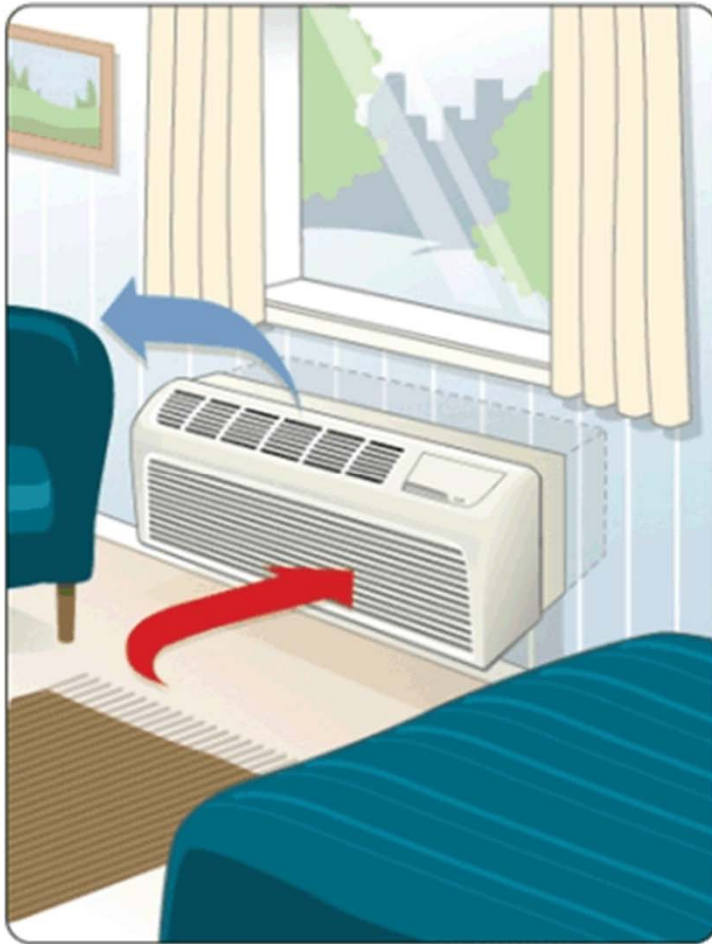


**PTAC-INTERIOR**

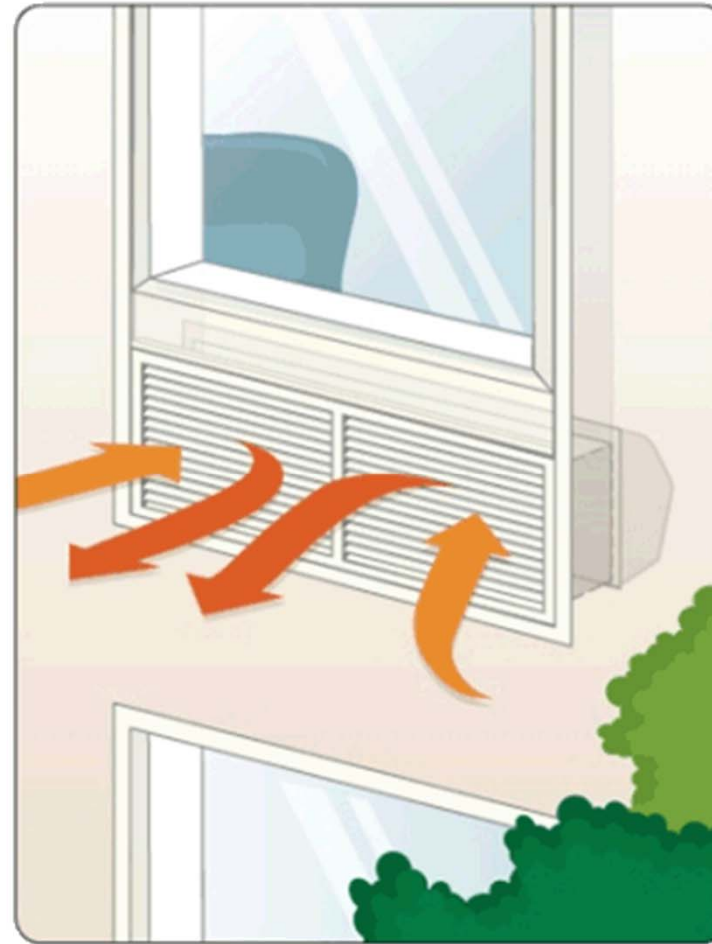

**PTAC-EXTERIOR**

## ➤ LED Display

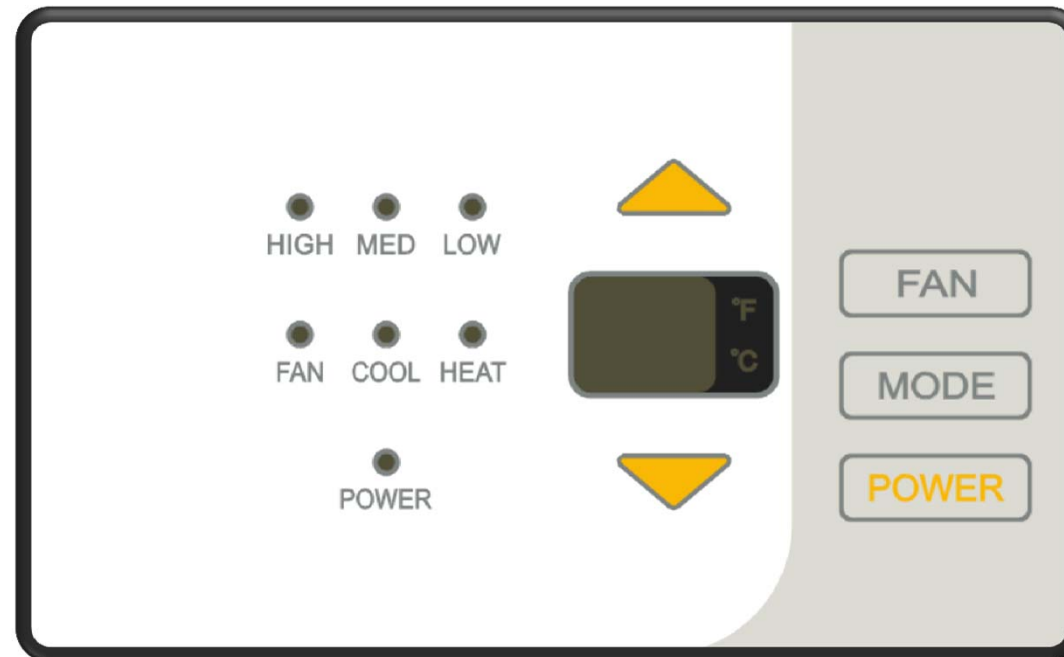

### LED display panel

Default setting

A) Cooling mode

B) High Fan speed



C) Setting temperature 78°F

## ➤ Auto-Restart



If the air conditioner shuts off unexpectedly due to the power off, it will restart to work under the previous setting mode automatically when the power resumes.

## ➤ Auto-defrosting function

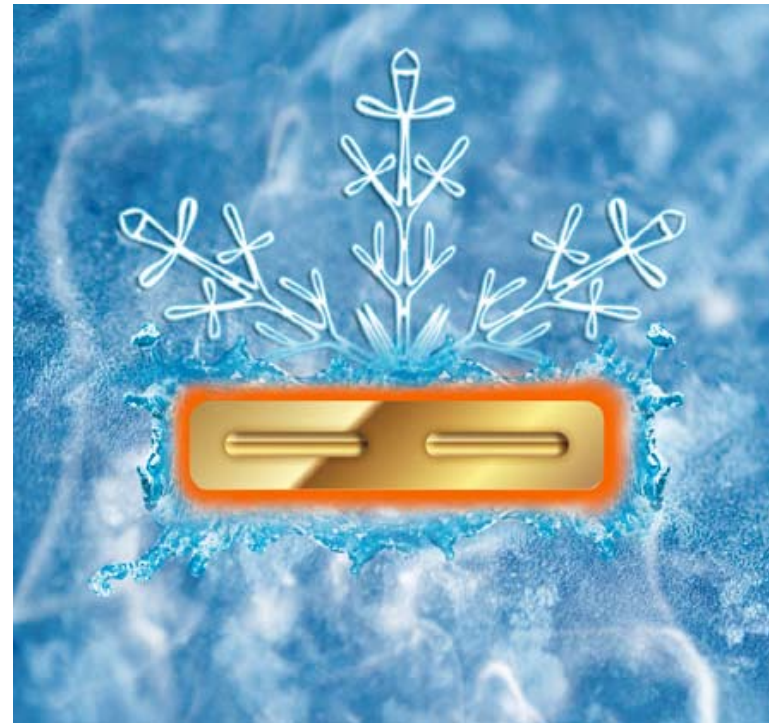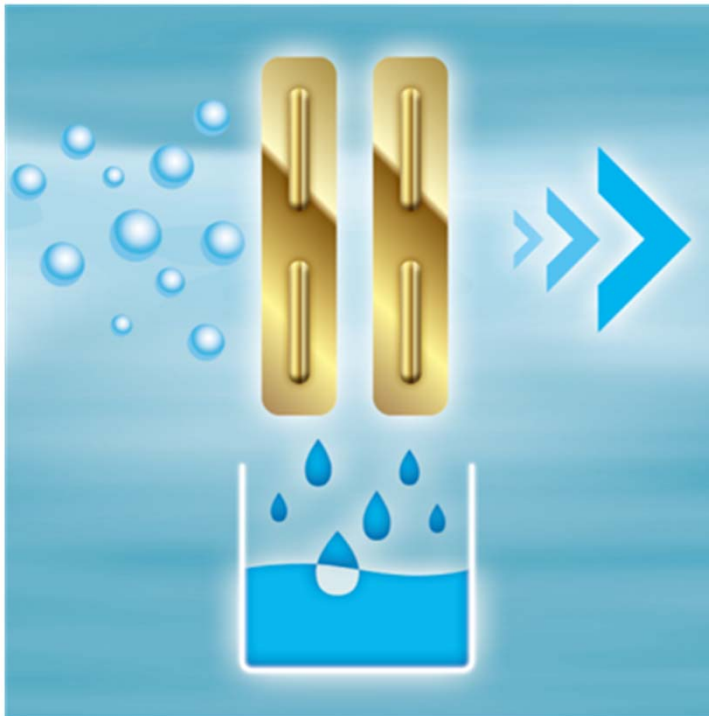

Prevent evaporator from freezing, prolong product life and improve energy saving.

## ➤ **Wired control (Optional)**

It is a optional function.  
With or without Clock, Timer function.  
Wire length: 0.85m;  
White (default) or silver  
Size: 235\*160\*95 mm

Wireless controller



24 Voltage Universal controller,  
Include Wired controller with weekly  
program (24V control) and wireless  
controller.

## ➤ Electric heater (Optional)



The PTAC has two different electric heaters:

One is the standard heater, it just has one output capacity, another is optional heater, it has two different output capacity, and it is easy to be change by the power cord.

## ➤ Health design (Optional)

Large ventilation door: let more fresh air into the room, and make quick air exchange.

open



close

- Normal filter
- Antibacterial filter (Optional)

Filter placed in a position easy to clean





## ➤ Accessory (Optional)



**Drain Kit**



**Extruded architectural grille**



**Wall sleeve**



**Aluminum grille**

## ➤ Features

### Standard Features



Auto Restart  
Function



Self-evaporative  
system



Easy Cleaned  
Panel



Fresh Air  
Ventilation



LED Display

### Optional Features




Timer











Golden Fin

## ➤ Product Lineup

 : Cooling and Heating

 : Cooling and Electric heater

Power supply	7K	9K	12K	15K
--------------	----	----	-----	-----

265V				
230V				

Refrigerant:R410A

