



FRIEDRICH

1883



PORTABLE AIR CONDITIONERS

Bucketless Design

Self evaporative condensate system means no bucket to empty. If tank should become full, the unit will automatically shut off and unit can be drained through the water outlet drain.

Features


- 3-IN-1 SYSTEM: Air conditioner, dehumidifier and fan
- LCD remote control
- Self evaporative condensate system
- 24 hour timer
- 3 fan speeds
- Plugs into standard 115 volt outlet
- Exhaust hoses and window kit included



Hoses extend from 24" to 60"




NOTE:
Venting of the unit to the outside is required for operating efficiency.

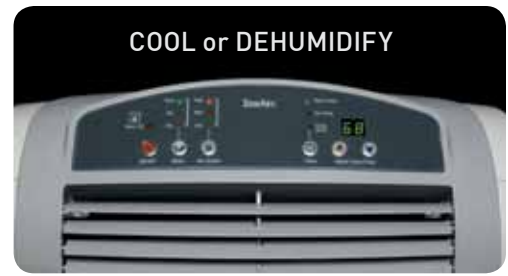

Ideal for these applications

- Workshops and garages
- Home offices
- Dorm rooms
- Bedrooms, attics and basements
- Sunrooms/ enclosed patios
- Supplemental or emergency cooling anywhere



Specifications

Model		P09B	P12B
PERFORMANCE			
Cooling Capacity	BTU/h	9300	11600
Energy Efficiency Rating	EER	9.4	8.8
Air Movement	CFM	212	235
Moisture Removal	Pts/hr.	5.0	6.0
SPECIFICATIONS			
Rated Current	Amps	10.8	11.5
Refrigerant Type		R410A	
Power Supply	Volts	115	
Dimensions- Inches	W	19 1/4	
	H	33 1/2	
	D	15 1/2	
Net Weight	Lbs.	89	90

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Wall Outlet Appearance	Power cord length
P09B, P12B	125V - 15A	5 - 15P		6 ft.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.




Friedrich Air Conditioning Co. | P.O. Box 1540 | San Antonio, TX 78295-1540 | 800-541-6645 | fax 210.357.4480
www.friedrich.com



Portable Accessories

DUAL INTAKE/ EXHAUST HOSES (Included)
Flexible, heavy duty intake/ exhaust hoses extend from 24" to 60". The hoses can be vented through a window or through a wall opening to the outside.

WINDOW SLIDER KIT (Included)

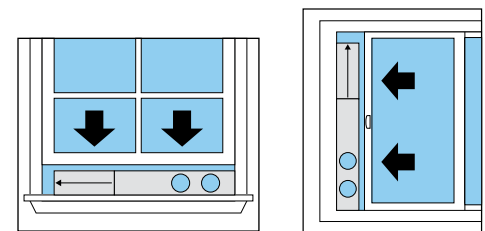

Fits HORIZONTAL or VERTICAL WINDOWS
WINDOW OPENING:

Minimum: 26"* Maximum: 46"

* Window slider kit can be trimmed to fit a smaller opening.